

Fontus Water is India's leading provider of water and wastewater solutions. With its years of rich experience, Fontus Water has built a strong team of professionals and engineers. It delivers solutions for the industrial, buildings and the government segments, with over 2000 installations across India. Supported by its R&D centre at Singapore and Goa and engineering centre in Pune, Fontus Water extends its philosophy of simplifying solutions for water and wastewater treatment through its revolutionary ergo range of products.

ergo RO S-Series

The ergo RO S-Series is a compact system ideal for all commercial drinking water requirements. Elegant in design the light weight ergo RO S-Series is easily portable. The most unique feature of the S-Series is that it saves 3 times more water than conventional RO systems. It can handle up to 50 litres per day and is compatible with direct flow as well as stand-alone point of use applications such as water coolers, pressure tanks and water kiosks. It has been designed to work efficiently within tap water TDS range upto 2000 mg/l.

Features & Benefits


Features	Benefits
High Recovery	Best-in-class recovery of 3 times more than conventional RO systems of 50 lph capacity
Compact and Portable	With a size of 44 x 26 x 44 cm and weight of 19 kg, it can be conveniently placed under pantry sinks, near coffee vending machines, water coolers and dispensers
Five Stage Water Filtration	Ensures best in class water treatment
Innovative & User Friendly Design	Services of trained technicians to replace cartridges and membranes are not required

Applications

- ▶ Drinking water treatment in commercial and office spaces for multiple applications such as in direct flow or with water coolers, dispensers, pressure tanks, etc



SAVES 3 TIMES MORE WATER THAN CONVENTIONAL RO SYSTEMS

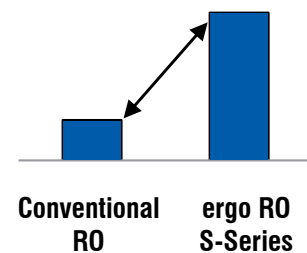

Easy Installation



Compact Size



Ergonomic Design



Minimum Footprint



Maximum Convenience



Plug & Play




Easy Maintenance



Fontus Service Advantage

Five Stages Of Water Treatment

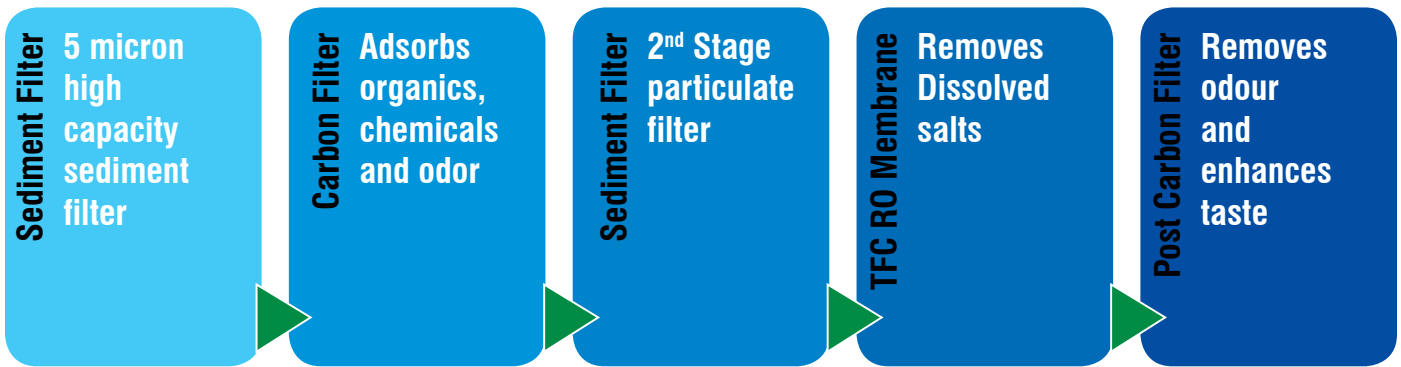

Technical Information

		ergo RO 3018
Specifications	Maximum flow rate	50 liters per hour
	Maximum recovery	55%
	Salt rejection	95 to 98%
Main Body	Dimensions	44 x 26 x 44 cm
	Weight	19 kg
Application Parameters	Operating pressure	30 to 80 psi
	Maximum pump pressure	125 psi
	Power input	110V 60 Hz / 220V 50 Hz
	Power consumption	72 W


Warranty & Delivery

Product warranty shall be effective from the date of installation. Warranty coverage period for different parts shall be as under:

- RO Membrane, pump and other electrical components - 1 Year
- Sediment Filter, Carbon Filter & Post Carbon Filter - 6 Months

Standard delivery time shall be 1 to 2 weeks, after receipt of payment.

Typical Under The Sink Installation

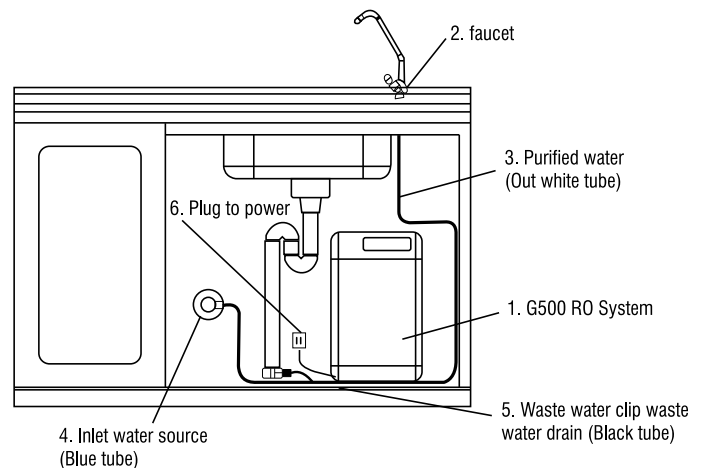

FONTUS WATER PVT. LTD.

A-1/152, Neb Sarai, IGNOU Road, New Delhi-110 068, INDIA
 T: +91-11-43100556/512 | F: +91-11-4310 0599 | M: +91-9810429166
 E: sales@fontuswater.com | W: www.fontuswater.com



AN EARTH WATER ENTERPRISE

Our Partner



CIN: U74899DL2001PTC111383

Version: FW01/05/14